

东莞日昇进出口有限公司

DONGGUAN SUNRISE IMPORT & EXPORT CO.,LTD

ADD: No. 6, Chongwen Lane 4, Xiang Wei, Dalang Town, Dongguan City, Dongguan City, Guangdong, CHINA

<https://www.sunrisedg.com> Email: Jesslin123@163.com WeChat /Whatsapp : +86 159 9271 9785

Double Wings Package Drop Tester

Model: SR-604D

Summary:

The machine is widely used to test a variety of products packaged in the handling or transportation to test the caused damage inside the product, and for the prevention of pesticide in advance, can use the machine to be tested is expected to arrive the best solution, so as to minimize transit losses, and to assess the impact of electronic components dropping resistance by the strength in the handling; packaging containers Ling, angle, surface reliability of the equipment.



Features:

- 1.Unique swing arm mechanism design, swing arm break away from acceleration more than 3 G/SEC.
- 2.With double column guide and hydraulic buffer absorb residual swing arm force, movements smooth, reliable, low noise.
- 3.Damping screw lifting mechanism, preventing drop institution unexpectedly glide.
- 4.Pneumatic automatic chain, preventing swing arm unusual break away.
- 5.Extensible support bracket and baseboard.

Test Standards:

Both Single swing and Double swing meet the following standards

- ISO 2248-1985 packaging - vertical impact drop test for full and complete transport packaging,
- GB/ t48575-92 drop test method for packaging transport packaging,
- JIS Z0202-1994 drop test method for packaging goods

Specifications:

Model	Double Wing Package Drop Tester	
Dropping height range	400~1500mm	400~2000mm
Display	Digital display / Digital height indicator (optional)	
Drop model	Free drop	
Height accuracy	≤ 3% of the setted value	
Maximum load	70kg	
Test space (LxWxH)	800x800x800mm	
Angle tolerance	≤5°	
motor	1/2HP	
Dimension (WxDxH)	1200*1400*2100	1200*1400*2450
Weight	About 330kg	About 450kg
Power supply	AC380V 50Hz or specified by user, compressed air 0.5~0.7Mpa	
Test Standards	ISO2248-72(E) GB/T4857.5 JISZ0202-87 IEC68-2-27	

Different models can be chosen



Single swing model: SR-604S

1. Drop height: 300~1500mm
2. Base plate size : 1200*1700mm
3. Reset mode : Electric reset
4. Suitable sample: Regular packaging, like box
5. Stable performance : 98%
6. Sample max load : 80kg
7. Sample max size : 1000*1000*1000mm
8. Sample plate size : 180*180*10mm
9. Power supply : 380V (or customized)
10. Machine weight : about 390kg


Double swing model: SR-604D

1. Drop height : 400~1500mm
2. Base plate size : 1400*1200mm
3. Reset mode : manual reset
4. Suitable sample: soft package, like gunny bag
5. Stable performance: 90%
6. Sample max load : 70kg
7. Sample max size : 800*800*800mm
8. Sample plate size : 700*350mm*10mm (2 pieces)
9. Power supply : 380V (or customized)
10. Machine weight : about 330kg

Different color you can choose




Double swing model details

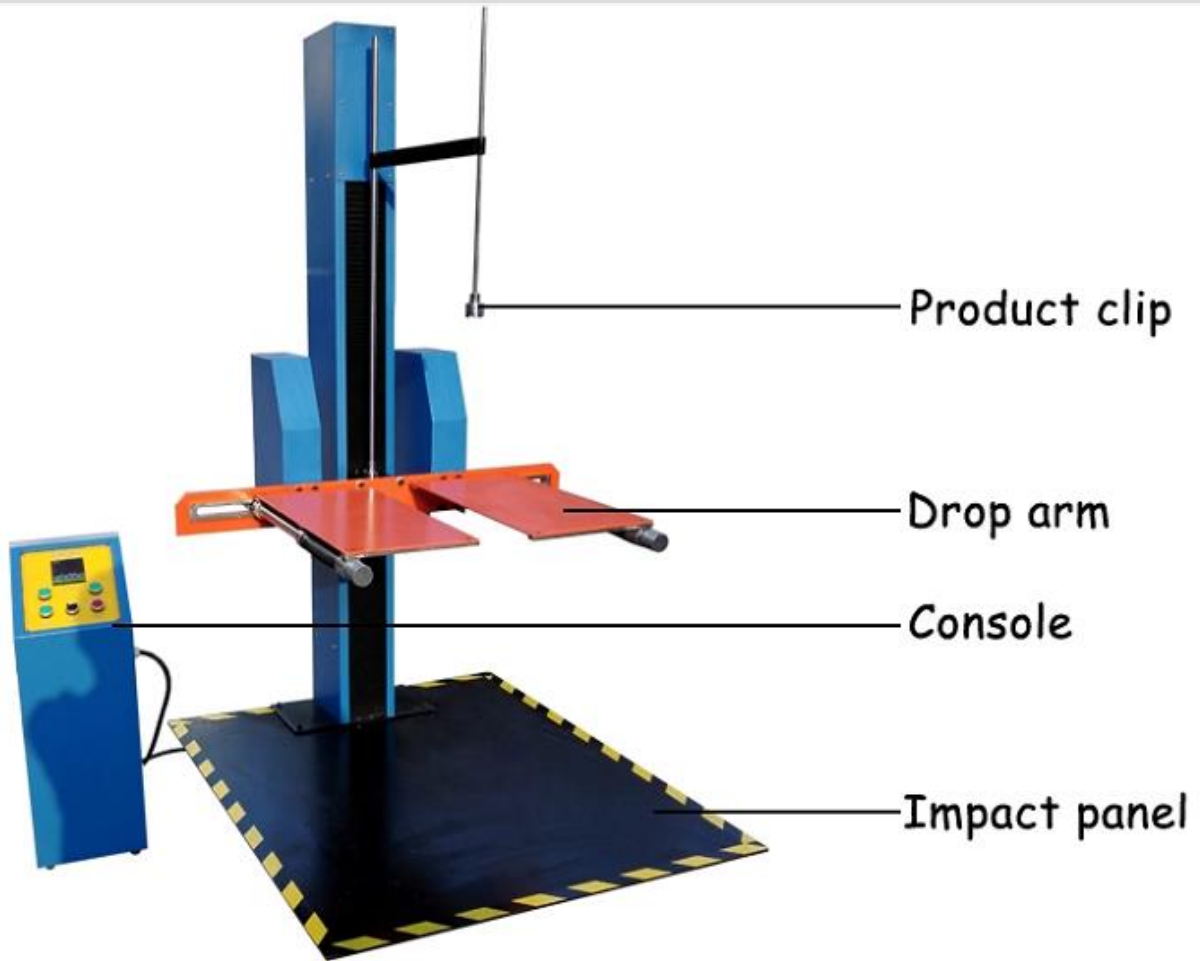



Different colors can be chosen

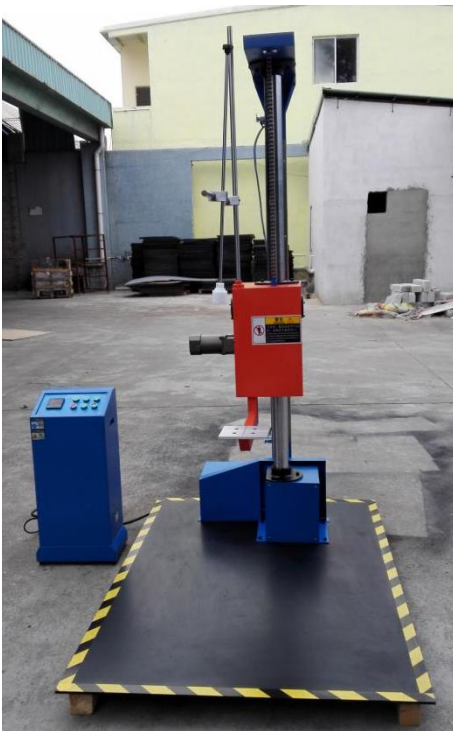




OUR TEAM



After-sales Service

SUNRISE Factory

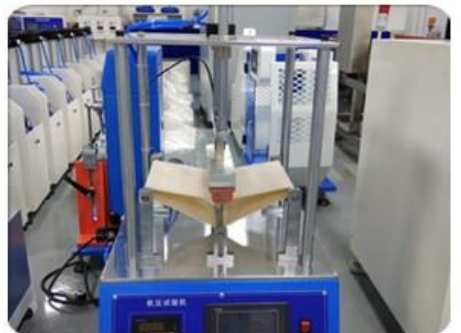

We have professional packaging teams and shipping forwarder to pack and deliver your products safely!

1. Out packing: Standard export wooden case.
2. Inner packing: With careful stretch film wrap products, hard wood board + strong bandage to fix corners.
3. Checking teams: Specialized staff to inspect and classified your goods.



