

东莞日昇进出口有限公司
DONGGUAN SUNRISE IMPORT & EXPORT CO.,LTD

ADD: No. 6, Chongwen Lane 4, Xiang Wei, Dalang Town, Dongguan City, Dongguan City, Guangdong, CHINA
<https://www.sunrisedg.com> Email: Jesslin123@163.com WeChat /Whatsapp : +86 159 9271 9785

Leather Softness Tester

Model: DZ-326

Summary :

It's applied to measure the softness of leather and animal skins in order to understand the softness and hardness is uniform or not in the same batch of leather, or the softness and hardness is difference or not in a single piece of soft leather.

It's applied to test leather performance in shoes, clothing, Luggage handbag industry, research laboratories; commodity inspection, arbitration and technical supervision departments.



Principles :

This machine make use of the Small pneumatic with load application of a force on the probe, and drop down in accordance with a certain speed, pressure natural on the test leather, teen read the leather softness index by the pointer gauge.

Standards :

This equipment meet the standard IULTCS , IUP/36.

Instruments of the apparatus:

◆ Instrument structure (Figure 1) :

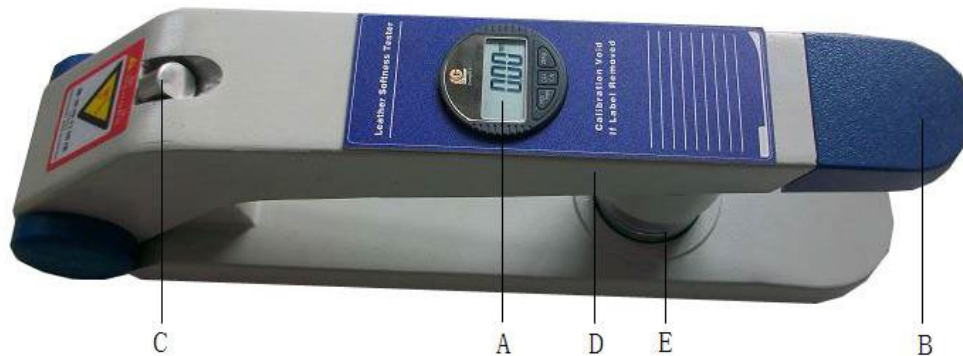


Figure 1

- A. Digital display gauge: (0.1~10mm)
- B. Pressuring handle
- C. Upper arm loosen button
- D. Upper arm
- E. Sample holder

Specifications:

Item	Specifications
Load	530±10g(by a small pneumatic control value drive)
Measure scale	0.1~10mm
Working way	Hand pressure
Dimension	50CM×10 CM×25CM
Weight	About 4kg
Accessories	20mm shrink ring 1pcs for fabric testing 25mm shrink ring 1pcs for leather testing

Instruments installation:

1. Working environment: Room temperature condition.
2. This instrument is carrying type instrument, please use in a flat place.

Real imagines for your good reference




Pointer table


You have to read the data on the table, after testing, the pointer will be reback the zero place.

Digital display table

You can read the test data on the table directly, and every time you tested, you should "Zero" firstly, then testing the next time.

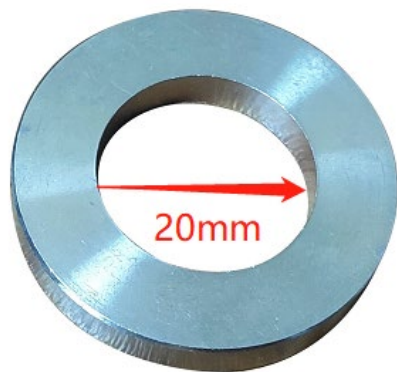

The device diameter is 20mm, it's mainly used in fabric softness testing.

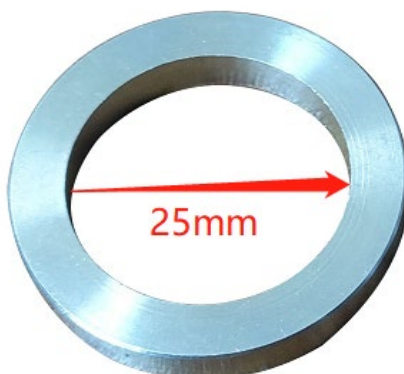

The device diameter is 25mm, it's mainly used in leather softness testing.



Professional packing

We have professional packaging teams and shipping forwarder to pack and deliver your products safely!

- ❖ Out packing: Standard export wooden case.
- ❖ Inner packing: With careful stretch film wrap products, hard wood board + strong bandage to fix corners.
- ❖ Checking teams: Specialized staff to inspect and classified your goods.

Any interests, pls contact Tracy as following Online contact way, easy and fast!

WeChat / Skype / Whatsapp / Tel : +86 159 9271 9785



What we produce? (always accept customize)

- | | | |
|------------------------------|--------------------------|--------------------------------|
| 1. Universal tensile testers | 2. Hardness testers | 3. Environmental chambers |
| 4. Mobile/Laptop testers | 5. Paper&package testers | 6. Abrasion resistance testers |
| 7. Insertion force tester | 8. Color testers | 9. Rubber/plastic testers |
| 10. Fabric testers | 11. Wire testers | 12. Other testers |

Any interests, pls contact Tracy as following Online contact way, easy and fast!

WeChat / Skype / Whatsapp / Tel : +86 159 9271 9785